

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : H04B 3/56		A1	(11) International Publication Number: WO 98/18211 (43) International Publication Date: 30 April 1998 (30.04.98)
(21) International Application Number: PCT/US97/19040 (22) International Filing Date: 21 October 1997 (21.10.97) (30) Priority Data: 08/734,361 21 October 1996 (21.10.96) US (71) Applicant: ELCOM TECHNOLOGIES CORPORATION [US/US]; 307 East Church Road, King of Prussia, PA 19406 (US). (72) Inventors: PATEL, Chandrakant, Bhailalbhai; 251 Hopewell Amwell Road, Hopewell, NJ 08525-3114 (US). HARFORD, Jack, Rudolph; 111 Harmony School Road, Flemington, NJ 08822 (US). SEGGERN, Glenn; 29 Pearson Circle, Springfield, PA 19064 (US). (74) Agents: NEY, Andrew, L. et al.; Ratner & Prestia, Suite 301, One Westlakes, Berwyn, P.O. Box 980, Valley Forge, PA 19482-0980 (US).			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: APPLIANCE ADAPTED FOR POWER LINE COMMUNICATIONS

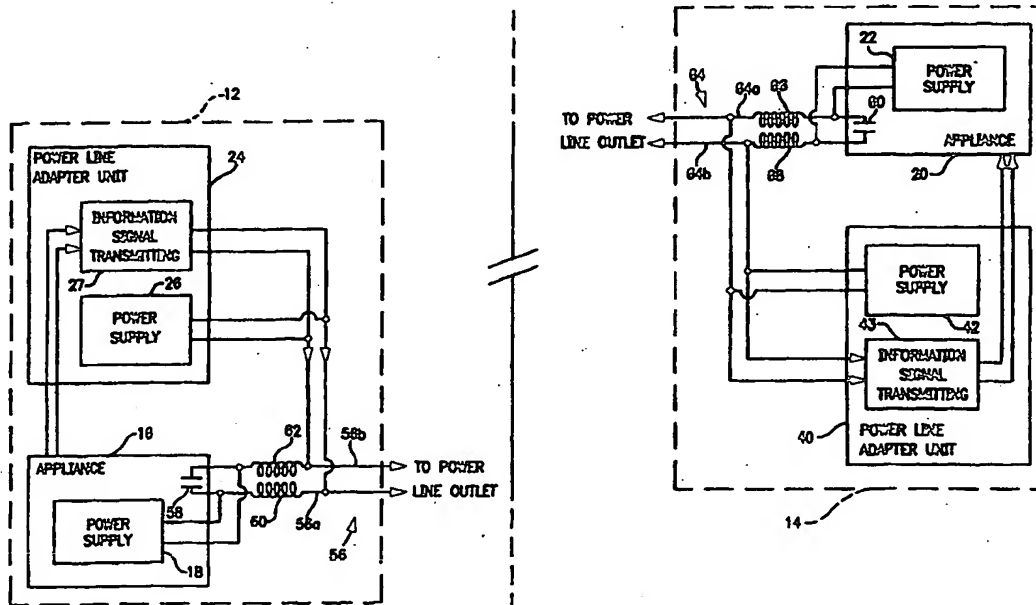

(57) Abstract

An electrical appliance (16) in which a power line adapter (24) is embodied. Information signals are conducted bidirectionally between the power line (10) and appliance (16), along the same connection (56) that provides power to the appliance (16).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

## APPLIANCE ADAPTED FOR POWER LINE COMMUNICATIONS

### TECHNICAL FIELD

The present invention relates, in general, to the communication of information along the power lines of a building and, in particular, to the adaptation of appliances for the transmission to and reception from the power lines of the information conducted along the power lines.

### BACKGROUND OF THE INVENTION

More and more interest is developing in the transmission of information along the power lines of a building. Currently, equipment is available for transmitting television, telephone, audio and computer signals along the building power lines instead of by dedicated wirings for the particular functions.

In such arrangements, a first unit is plugged into an electrical outlet and an information signal is conducted from a source of the information signal through the first unit to the power line and transmitted to a second unit where it is received and conducted through the second unit to a utilization unit where it is used. For example, for the transmission and reception of television signals, the first unit is positioned at the entry into the building of a cable or antenna wire input and the input television signal is conducted to the power line through the first unit and transmitted along the power line to the second unit where it is received and conducted by the second unit to the television set for viewing.

At the present time, two pieces of equipment, which are separately manufactured, are plugged into outlets at a particular location where the information signal is being conducted to or from the power line. One is the appliance which is the source or receiver of the information signal (e.g. television set, computer, stereo, cable box, telephone) and the other is the power line communications (PLC) adapter which receives the information signal from the appliance or the power line and conducts it to the power line or the appliance. The appliance is connected to the power line to receive power and the PLC adapter is connected to the power line to receive power and conduct the information signal to or from the power line.

- 2 -

It can be expected that, in the future, appliance manufacturers will manufacture certain of their appliances embodying the PLC adapter so that only one unit, namely the appliance with the PLC adapter embodied, will be plugged into the power line. Such units can be characterized as "PLC ready." The two parts of such units (i.e. the appliance portion and the PLC adapter portion) will be powered by a common connection to the power line and the information signal will be conducted to or from the appliance through the PLC adapter and to and from the power line along the same connection to the power line.

Every appliance that is connected to a power line must be arranged so that it does not "inject" into the power line signals that are objectionable to government regulations. In the United States, FCC Part 15 defines these restrictions based on the class of appliance and its manner of operation. For example, for television sets, signal frequencies within the television set should not be "injected" into the power line. Television sets generate dc power supply voltage from horizontal frequency based oscillators, with many having switching power supplies with a switching frequency in the range of 100 kHz, 200 kHz or higher which must not reach the power line to which the television set is connected.

To meet these requirements, filters, commonly called "line filters," are built into the appliance and disposed between the power line and the power supply of the appliance and other circuits in the appliance. There are a number of varieties of these filters, the most common being a "bypass" capacitor, usually 0.22  $\mu$ f, across the high to neutral, high to ground and/or neutral to ground terminals. This bypass capacitor prevents relatively high frequency signals within the television set from reaching the power line. There is some circuitry ahead of this "bypass" capacitor which provides somewhat higher impedance to high frequencies, but significant leakage, which exceeds government regulations, still can occur. The "bypass" capacitor prevents such leakage to the power line.

It is common practice to include surge protecting circuitry in electrical appliances. Such surge protecting circuitry presents a low impedance path between the high and neutral or ground terminals. A low impedance path between the high and

- 3 -

neutral terminals will be common to a signal path to and from the power line for the PLC adapter portion of the appliance when the appliance is PLC ready with the PLC adapter embodied in the appliance. This will result in attenuated or reduced signal input to and/or received from the power line. For example, for a PLC ready cable box, this can affect the cable television signals conducted to the power line for transmission along the power line to a television set for viewing at a remote location. For PLC ready television sets, this can affect the television signals conducted from the power line to the television set and a remote control signal conducted from the television set to the power line for transmission along the power line to a tuner for channel selection at a remote location. For PLC ready computers, this can affect the computer signals conducted to the power line for transmission along the power line to another computer at a remote location and the signals conducted from the power line to a computer. The same undesired attenuation or reduction in signal strength can occur for other PLC ready appliances such as telephones and stereos.

15

### SUMMARY OF THE INVENTION

An electrical appliance adapted for conducting information signals to or from the appliance from or to a power line, constructed in accordance with the present invention, includes, in a first form of the invention, means for conducting information signals to a power line and, in a second form of the invention, means for conducting information signals from a power line.

20

Included in the first form of the present invention are a source for supplying information signals and having a power supply and a power line adapter unit having a power supply and information signal transmitting means for conducting information signals from the source to a power line. The first form of the present invention also includes a power line connector for connecting the power supply of the source, the power supply of the power line adapter unit, and the information signal transmitting means to a power line. The first form of the present invention further includes means for preventing information signals from the information signal transmitting means from being conducted to the source along the power line connector.

25

- 4 -

Included in the second form of the present invention are a utilization unit for using information signals and having a power supply and a power line adapter unit having a power supply and information signal receiving means for conducting information signals from a power line to the utilization unit. The second form of the present invention also includes a power line connector for connecting the power supply of the utilization unit, the power supply of the power line adapter unit, and the information signal receiving means to a power line. The second form of the present invention further includes means for preventing information signals from a power line from being conducted directly from a power line to the utilization unit.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a circuit diagram of a power line communications system constructed in accordance with the present invention and having both forms of an electrical appliance constructed in accordance with the present invention.

Figure 2 is a block diagram of the power line adapter units shown in

Figure 1.

#### DETAILED DESCRIPTION OF THE INVENTION

Referring to Figure 1, a power line communications system, constructed in accordance with the present invention and having both forms of an electrical appliance constructed in accordance with the present invention, includes a power line 10, means, identified by reference numeral 12, for conducting information signals to a power line, and means, identified by reference numeral 14, for conducting information signals from a power line. The source of the information signals is a first appliance 16, such as a television cable box, which has a power supply 18. The utilization unit of the information signals is a second appliance 20, such as a television set, which has a power supply 22.

Associated with first appliance 16 is a first power line adapter unit 24 having a power supply 26 and information signal transmitting means 27 for conducting information signals from the first appliance to power line 10. As shown in Figure 2, power line adapter unit 24 includes a ferrite core coupler 29 for isolating information

- 5 -

signal transmitting means 27 from power line 10. Coupler 29 also couples information signals from information signal transmitting means 27 to power line 10. Coupler 29 functions as a signal transformer and preferably is arranged to exhibit a sharp roll off below a frequency of 1 MHz, thereby attenuating interference from power line frequency 5 60 Hz in the United States and harmonics of the power line frequency. The ferrite material is selected for the frequency range of operation, namely the nature and character of the information signals.

The design parameters of ferrite core coupler 29 include the size and material of the bead or core and the number of turns. Usually, a bifilar wire is used, 10 thereby providing close coupling between the input and the output. A capacitor 30 and a plug 31 connect coupler 29 to power line 10 by way of an outlet 32 which is connected to the power line.

Information signal transmitting means 27 also include a band pass filter 33 for selectively passing information signals from first appliance 16 to power line 10. 15 Bandpass filter 33 is designed to provide minimal distortion at the frequencies of interest and attenuate out-of-band noise and interference to information signal transmitting means 27. Specific traps also can be designed to reject known interfering signals to improve system performance.

Information signal transmitting means 27 further include an impedance 20 matching pad 34 for minimizing mismatches between the impedance of bandpass filter 33 and the impedance at outlet 32 connected to power line 10 and to which information signal transmitting means 27 are connected. A power line, for example from outlet 32 to another outlet, presents different loads at different times in a power line communications system. Impedance pad 34, placed between coupler 29 and bandpass filter 33, alleviates 25 the effect of wide variations of impedance mismatches between power line 10 and bandpass filter 33, while retaining the frequency response characteristics of bandpass filter 33.

Information signal transmitting means 27 preferably include amplifier and shaper means 35, disposed between first appliance 16 and bandpass filter 33, for

- 6 -

amplifying and shaping the information signals supplied to information signal transmitting means 27 from first appliance 16.

Coupler 29, bandpass filter 33, and impedance pad 34 form a coupling circuit which allows the selection of a desired band of frequencies for signal transmission to the desired degree of selectivity for a given application. For example, in television transmissions, the signal bandwidth is at least 6 MHz.

Associated with second appliance 20 is a second power line adapter unit 40 having a power supply 42 and information signal receiving means 43 for conducting information signals from power line 10 to the second appliance. As shown in Figure 2, power line adapter unit 40 includes a ferrite core coupler 44 for isolating information signal receiving means 43 from power line 10. Coupler 44 also couples information signals from power line 10 to information signal receiving means 43. Like coupler 29, coupler 44 functions as a signal transformer and preferably is arranged to exhibit a sharp roll off below a frequency of 1 MHz, thereby attenuating interference from the power line frequency and its harmonics. Again, the ferrite material is selected for the frequency range of operation, namely the nature and character of the information signals.

As with coupler 29, the design parameters of ferrite core coupler 44 include the size and material of the bead or core and the number of turns. Usually, a bifilar wire is used, thereby providing close coupling between the input and the output. A capacitor 45 and a plug 46 connect coupler 44 to power line 10 by way of an outlet 47 which is connected to the power line.

Information signal receiving means 43 also include a band pass filter 47 for selectively passing information signals from power line 10 to second appliance 20. As with bandpass filter 33, bandpass filter 47 is designed to provide minimal distortion at the frequencies of interest and attenuate out-of-band noise and interference to information signal receiving means 43. Again, specific traps also can be designed to reject known interfering signals to improve system performance.

Information signal receiving means 43 further include an impedance matching pad 48 for minimizing mismatches between the impedance of bandpass filter 47

- 7 -

and the impedance at outlet 47 connected to power line 10 and to which information signal receiving means 43 are connected. As indicated above, a power line, for example from outlet 47 to another outlet, presents different loads at different times in a power line communications system. Impedance pad 48, placed between coupler 44 and bandpass filter 47, alleviates the effect of wide variations of impedance mismatches between power line 10 and bandpass filter 47, while retaining the frequency response characteristics of bandpass filter 47.

Information signal receiving means 43 preferably includes amplifier and shaper means 49, disposed between second appliance 20 and bandpass filter 47, for amplifying and shaping the information signals supplied to information signal receiving means 43 from power line 10.

Coupler 44, bandpass filter 47, and impedance pad 48 form a coupling circuit which allows the selection of a desired band of frequencies for signal transmission to the desired degree of selectivity for a given application. Again, for example, in television transmissions, the signal bandwidth is at least 6 MHz.

Associated with first appliance 16 is a first power line connector 56 for connecting power supply 18 of first appliance 16, power supply 26 of first power line adapter unit 24, and information signal supplying means 27, namely the circuitry of Figure 2, to power line 10. In this way, first appliance 16 and first power line adapter unit 24 are powered and information signals from first appliance 16 are conducted through power line adapter unit 24 to power line 10.

In order to prevent the information signals conducted to power line 10 by first power line connector 56 from being shorted by a "bypass" capacitor 58, which is included in first appliance 16 to prevent signal frequencies generated within the first appliance from being "injected" into power line 10 and to which the information signals might otherwise be conducted by first power line connector 56, means are provided for preventing the information signals from first appliance 16 from being conducted to first appliance along first power line connector 56. Such means include, for example for the embodiment of the invention being described, a pair of inductors 60 and 62 placed in "hot" wire 56a and "neutral" wire 56b, respectively, of first power line connector 56 and

which present a high impedance path for the signal frequencies of the information signals from information signal transmitting means 27 between power line 10 and "bypass" capacitor 58. Inductors 60 and 62 can be ferrite beads in series from the "hot" and "neutral" connections, respectively, to power line 10 and "bypass" capacitor 58. As an  
5 alternative to inductors 60 and 62, a filter network, including the transformer coupler by which the information signals are coupled to power line 10, can be arranged to perform the same function. The objective of any such arrangement is to provide a low impedance path to ground for the undesirable high frequencies which might be generated within first appliance 16 and a high impedance for the frequencies of the information signals so that  
10 the information signals are conducted from information signal transmitting means 27 to power line 10.

Associated with second appliance 20 is a second power line connector 64 for connecting power supply 22 of second appliance 20, power supply 42 of second power line adapter unit 40, and information signal receiving means 43, namely the circuitry of  
15 Figure 2, to power line 10. In this way, second appliance 20 and second power line adapter unit 40 are powered and information signals from second appliance 20 are conducted through power line adapter unit 40 to power line 10.

In order to prevent the information signals conducted from power line 10 by second power line connector 64 from being shorted by a "bypass" capacitor 60, which  
20 is included in second appliance 20 to prevent signal frequencies generated within the second appliance from being "injected" into power line 10 and to which the information signals might otherwise be conducted by second power line connector 64, means are provided for preventing the information signals from power line 10 from being conducted to second appliance 20 along second power line connector 64. Such means include, for  
25 the embodiment of the invention being described, a pair of inductors 66 and 68 placed in "hot" wire 64a and "neutral" wire 64b, respectively, of second power line connector 64 which present a high impedance path for the signal frequencies of the information signals from power line 10 between power line 10 and "bypass" capacitor 60. As with inductors 60 and 62, inductors 66 and 68 can be ferrite beads in series from the "hot" and "neutral" connections, respectively, to power line 10 and "bypass" capacitor 60. Again, as an  
30

- 9 -

alternative to inductors 66 and 68, a filter network, including the transformer coupler by which the information signals are coupled from power line 10, can be arranged to perform the same function. The objective of any such arrangement is to provide a low impedance path to ground for the undesirable high frequencies which might be generated within second appliance 20 and a high impedance for the frequencies of the information signals so that the information signals are conducted from power line 10 to information signal receiving means 43.

The operation of the power line communications system illustrated in Figure 1 will be explained by way of an example in which first appliance 16 is a cable television box and second appliance 20 is a television set. Television signals from the cable television box are conducted through information signal transmitting means 27 and first power line connector 56 to power line 10. The television signals are conducted along power line 10 and through second power line connector 64 and information signal receiving means 43 to the television set.

It will be evident that power line adapter units 24 and 40 each can be arranged to both transmit and receive information signals. For example, power line adapter unit 40, besides receiving television signals from power line 10 which are conducted to a television set (i.e. second appliance 20), can also have information signal transmitting means similar to information signal transmitting means 27, to receive remote control signals (i.e. information signals) from the television set which are conducted by power line adapter unit 40 and second power line connector 64 to power line 10. Such remote control signals are prevented from being shorted by "bypass" capacitor 60 by inductors 66 and 68. Instead, these remote control signals are conducted along power line 10 and first power line connector 56 to power line adapter unit 24, which can also have information signal receiving means, similar to information signal receiving means 43. The remote control signals, in turn, are conducted to a tuner control circuit for channel selection.

- 10 -

While there have been described preferred embodiments of the present invention, it should be obvious to those skilled in the art that various modifications and changes can be made without departing from the true spirit and scope of the invention.

1. An electrical appliance adapted for conducting information signals to or from the appliance from or to a power line, the electrical appliance comprising at least one of:

(A) means for conducting information signals to a power line including:

(1) a source for supplying information signals and having a power supply,

(2) a power line adapter unit having:

(a) a power supply, and

(b) information signal transmitting means for conducting information signals from said source to a power line,

(3) a power line connector for connecting:

(a) said power supply of said source,

(b) said power supply of said power line adapter unit for conducting information signals from said source to a power line, and

(c) said information signal transmitting means to a power line, and

(4) means for preventing information signals from said information signal transmitting means from being conducted to said source along said power line connector; and

(B) means for conducting information signals from a power line including:

(1) a utilization unit for using information signals and having a power supply,

(2) a power line adapter unit having:

- 12 -

- 26 (a) a power supply, and  
27 (b) information signal receiving means for conducting  
28 information signals from a power line to said utilization unit,  
29 (3) a power line connector for connecting:  
30 (a) said power supply of said utilization unit,  
31 (b) said power supply of said power line adapter for  
32 conducting information signals from a power line to said  
33 utilization unit, and  
34 (c) said information signal receiving means  
35 to a power line, and  
36 (4) means for preventing information signals from a power line  
37 from being conducted directly from a power line to said utilization  
38 unit.

1 2. An electrical appliance according to claim 1 wherein said means for  
2 preventing information signals from said information signal transmitting means from  
3 being conducted to said source and said means for preventing information signals from a  
4 power line from being conducted directly to said utilization unit each form a high  
5 impedance for the frequencies of the information signals.

1 3. An electrical appliance according to claim 2 wherein:  
2 (a) each of said power line connectors includes a "hot" wire and a  
3 "neutral" wire,  
4 (b) said means for preventing information signals from said information  
5 signal transmitting means from being conducted to said source include a  
6 first and second inductors placed in said "hot" wire and said "neutral"  
7 wire, respectively, of said power line connector and which present a high  
8 impedance path for signal frequencies of the information signals from a  
9 power line between a power line and said source, and

- 13 -

10 (c) said means for preventing information signals from a power line  
11 from being conducted directly to said utilization unit include a first and  
12 second inductors placed in said "hot" wire and said "neutral" wire,  
13 respectively, of said power line connector and which present a high  
14 impedance path for the signal frequencies of the information signals from a  
15 power line between a power line and said utilization unit.

1 4. A power line communications system comprising:

2 a power line;

3 a first appliance for supplying information signals and having a power  
4 supply;

5 a first power line adapter unit having:

6 (a) a power supply, and

7 (b) information signal transmitting means for conducting information  
8 signals from said first appliance to said power line;

9 a first power line connector for connecting:

10 (a) said power supply of said first appliance,

11 (b) said power supply of said first power line adapter, and

12 (c) said information signal transmitting means

13 to a power line;

14 means for preventing information signals from said information signal  
15 transmitting means from being conducted to said first appliance along said first power line  
16 connector;

17 a second appliance for receiving information signals and having a power  
18 supply;

19 a second power line adapter unit having:

20 (a) a power supply, and

- 14 -

21 (b) information signal receiving means for conducting information  
22 signals from a power line to said second appliance;

23 a second power line connector for connecting:

24 (a) said power supply of said second appliance,

25 (b) said power supply of said second power line adapter, and

26 (c) said information signal receiving means

27 to a power line; and

28 means for preventing information signals from a power line from being  
29 conducted directly from a power line to said second appliance along said second power  
30 line connector.

1 5. An electrical appliance for supplying information signals to a power  
2 line comprising:

3 a source of information signals having a power supply;

4 a power line adapter unit having:

5 (a) a power supply, and

6 (b) information signal transmitting means for conducting information  
7 signals from said source of information signals a power line;

8 a power line connector for connecting:

9 (a) said power supply of said source of information signals,

10 (b) said power supply of said power line adapter unit, and

11 (c) said information signal transmitting means

12 to a power line; and

13 means for preventing information signals from said information signal  
14 transmitting means from being conducted to said source of information signals along said  
15 power line connector.

1           6.     An electrical appliance according to claim 5 wherein said means for  
2 preventing information signals from said information signal transmitting means from  
3 being conducted to said source of information signals along said power line connector  
4 form a high impedance for the frequencies of the information signals.

1           7.     An electrical appliance according to claim 6 wherein said power  
2 line connector includes a "hot" wire and a "neutral" wire, and said means for preventing  
3 information signals from said information signal transmitting means from being conducted  
4 to said source of information signals along said power line connector include a first and  
5 second inductors placed in said "hot" wire and said "neutral" wire, respectively, of said  
6 power line connector and which present a high impedance path for signal frequencies of  
7 the information signals from a power line between a power line and said source for  
8 supplying information signals.

1           8.     An electrical appliance for receiving information signals from a  
2 power line comprising:  
3                 a utilization unit for using information signals and having a power supply;  
4                 a power line adapter unit having:  
5                 (a)     a power supply, and  
6                 (b)     information signal receiving means for conducting information  
7 signals from a power line to said utilization unit for using information  
8 signals;  
9                 a power line connector for connecting:  
10                (a)     said power supply of said utilization unit for using information  
11 signals,  
12                (b)     said power supply of said power line adapter unit, and  
13                (c)     said information signal receiving means  
14 to a power line; and

15 means for preventing information signals from a power line from being  
16 conducted directly from a power line to said utilization unit for using information signals  
17 along said power line connector.

1 9. An electrical appliance according to claim 8 wherein said means for  
2 preventing information signals from a power line from being conducted directly from a  
3 power line to said utilization unit for using information signals along said power line  
4 connector form a high impedance for the frequencies of the information signals.

1 10. An electrical appliance according to claim 9 wherein said power  
2 line connector includes a "hot" wire and a "neutral" wire, and said means for preventing  
3 information signals from a power line from being conducted directly from a power to said  
4 utilization unit for using information signals along said power line connector include first  
5 and second inductors placed in said "hot" wire and said "neutral" wire, respectively, of  
6 said power line connector and which present a high impedance path for signal frequencies  
7 of the information signals from a power line between a power line and said utilization unit  
8 for using information signals.

1/2

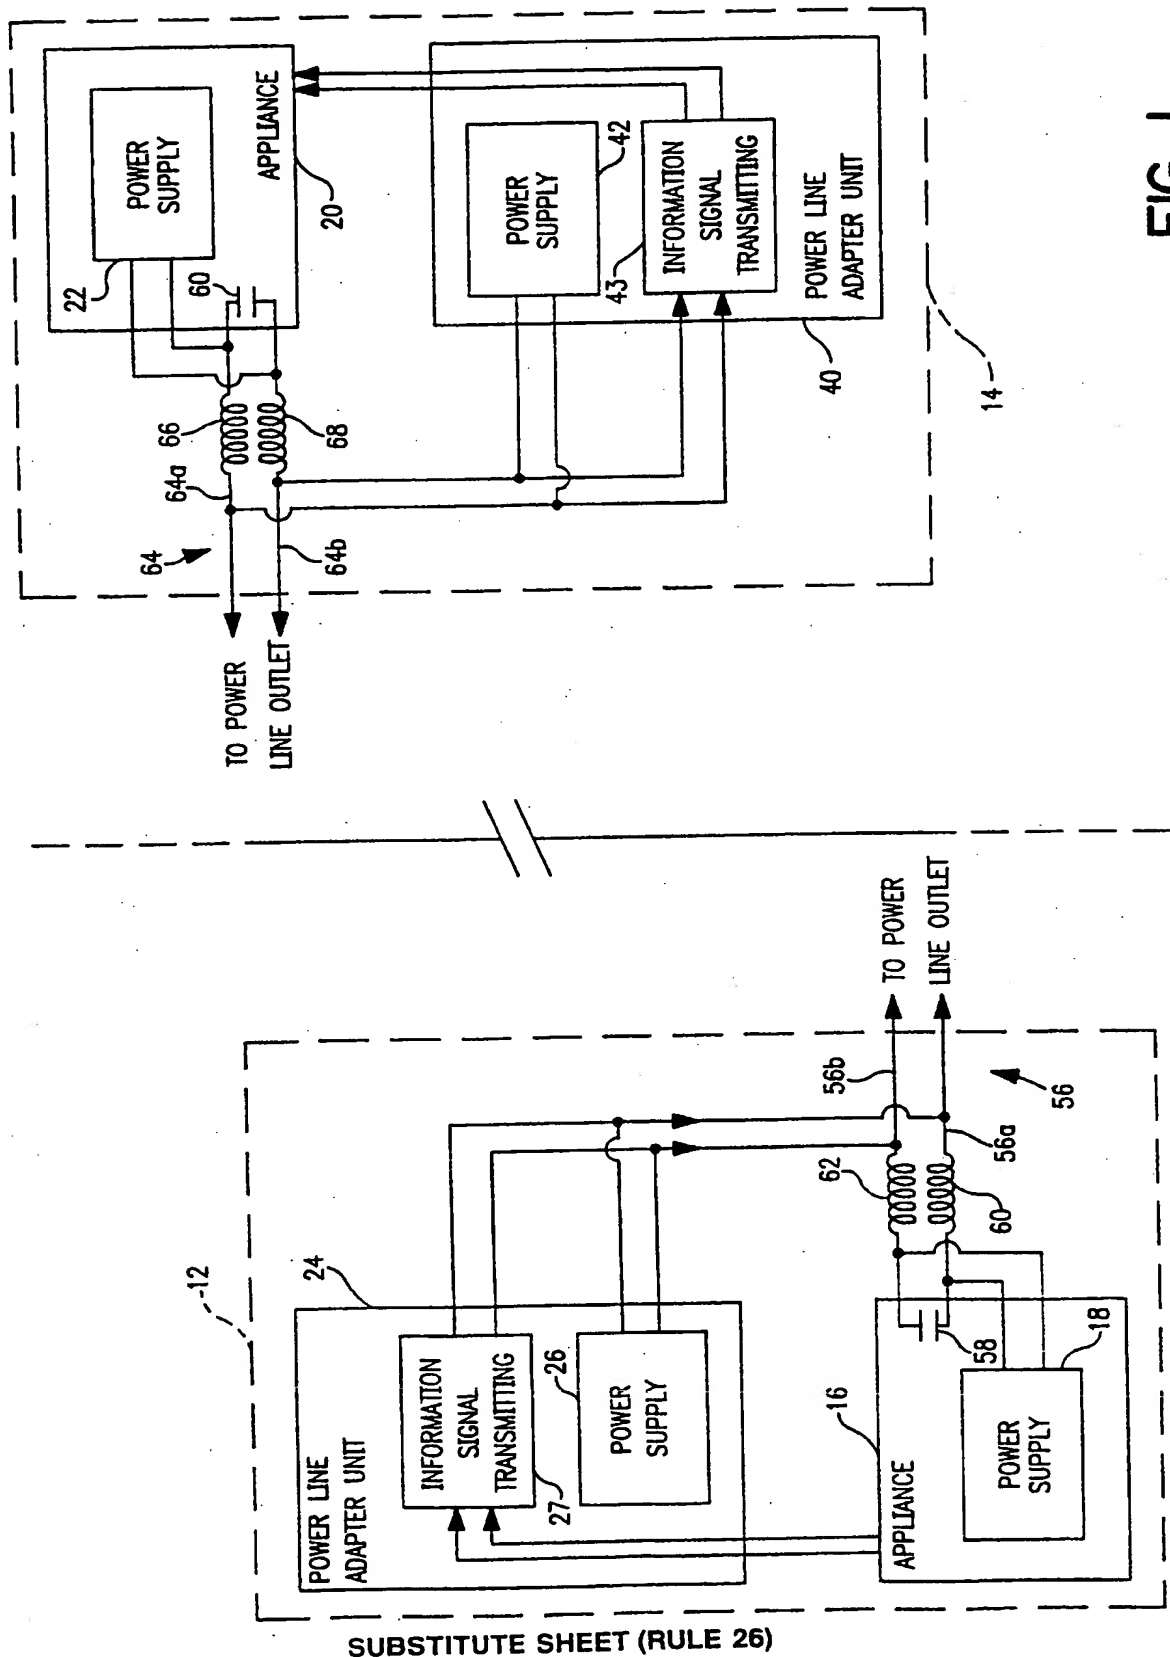


FIG. 1

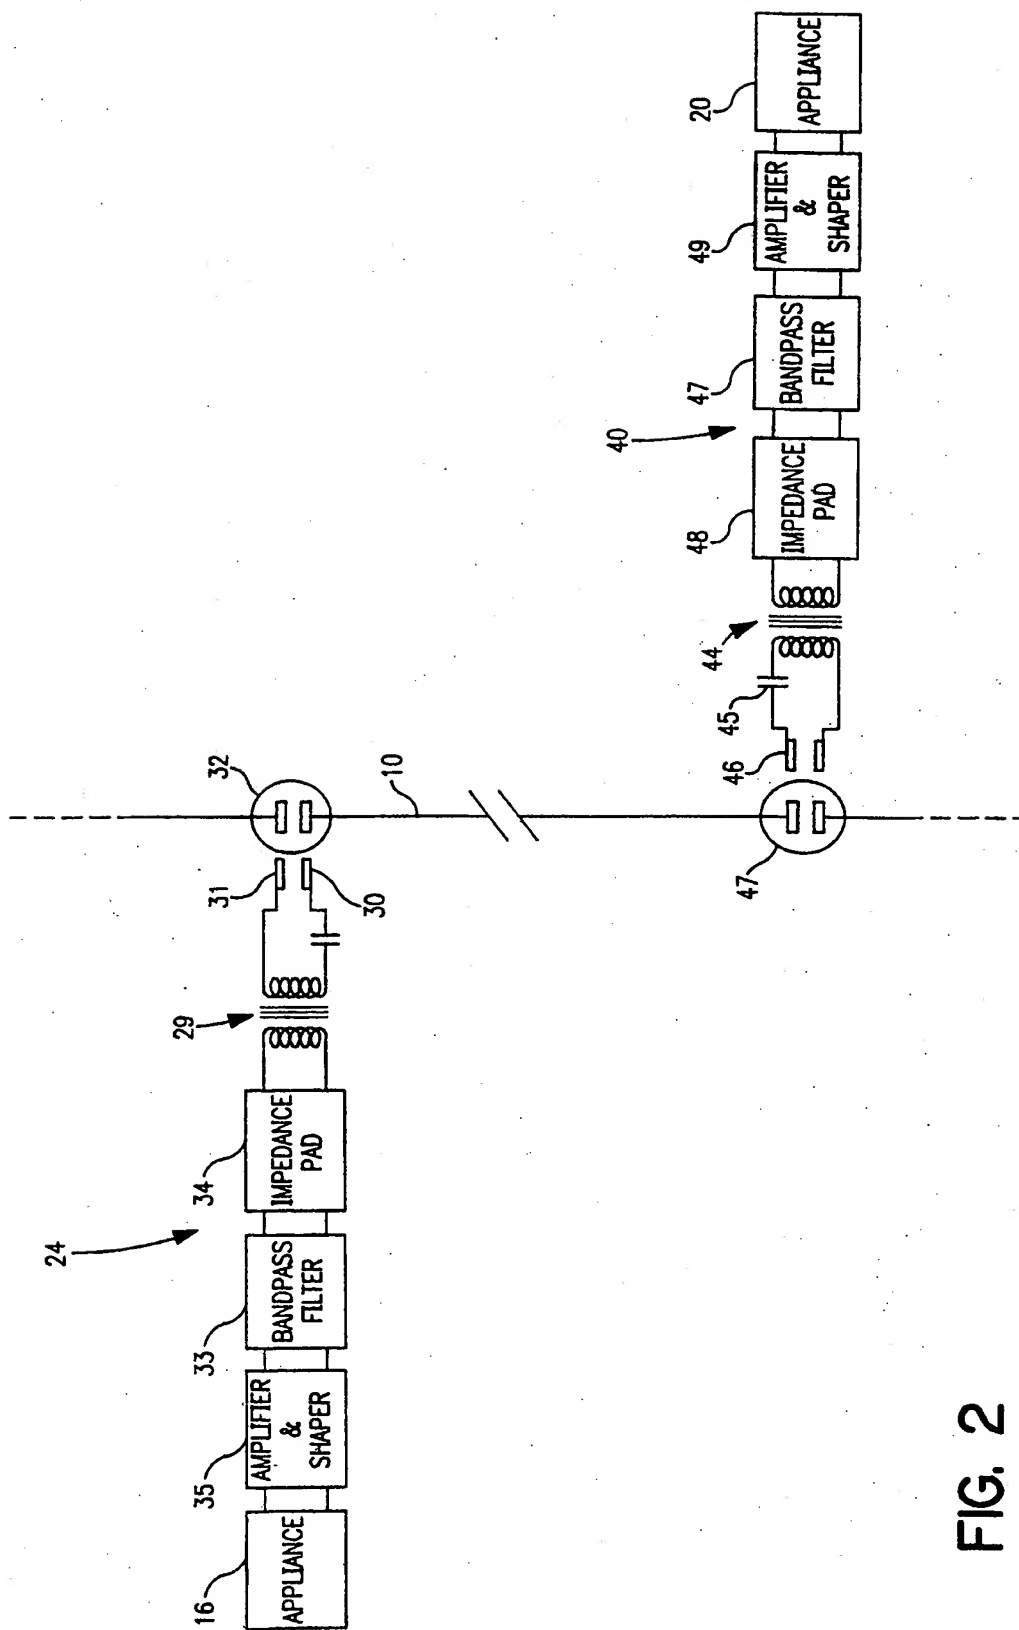


FIG. 2

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 97/19040

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04B3/56

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 08892 A (ABRAHAM CHARLES) 21 March 1996 see page 34, line 24 - page 40, line 20; figures 1,2	1,3-5,7, 8,10
A	WO 94 09572 A (NORWEB PLC ;BROWN PAUL A (GB)) 28 April 1994 see page 4, line 22 - page 5, line 25 see page 8, line 22 - page 9, line 9 see page 10, line 10 - page 11, line 14 see page 12, line 8 - line 24 see figures 1,6,10	1-10



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

18 February 1998

Date of mailing of the international search report

25/02/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Harris, E

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/19040

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
W0 9608892 A	21-03-96	US 5592482 A AU 3510895 A US 5625863 A	07-01-97 29-03-96 29-04-97
W0 9409572 A	28-04-94	AU 673388 B AU 5373294 A CA 2146648 A EP 0667067 A FI 951844 A GB 2272350 A,B GB 2304013 A,B JP 8505272 T NO 951500 A US 5684450 A	07-11-96 09-05-94 28-04-94 16-08-95 18-04-95 11-05-94 05-03-97 04-06-96 20-04-95 04-11-97